

AXOP39032/4/S

2MHz RRIO Operational Amplifiers (Dual/Quad)



Datasheet – Nov 2022

Description

The AXOP39032 (dual), and AXOP39034 (quad) are dual and quad low power low voltage (1.5V to 5.5V) operational amplifiers (opamps) with rail-to-rail input and output swing capabilities. These devices are very suitable for applications where low voltage operation, a small footprint, and high capacitive load drive are required. AXOP39032S and AXOP39034S are with Shutdown function.

Features

- Excellent THD+N 100dB
- Excellent SNR 100dB
- Rail-to-rail input and output
- Low input offset voltage: $\pm 0.5\text{mV}$ typ
- Unity-gain bandwidth: 2MHz
- Low quiescent current (per opamp): $25\mu\text{A}$ typ
- Operational at supply voltages as low as 1.5V
- Easier to stabilize with higher capacitive load due to resistive open-loop output impedance
- Shutdown function (AXOP39032S and AXOP39034S)

Applications

- Infotainment system
- HVAC: heating, ventilating, and air conditioning
- Motor control
- Wearable devices
- Sensor signal conditioning
- Power modules
- Active filters

Table 1 Device Summary

Order code	Package	Packing
AXOP39032A	TSSOP8	Reel
AXOP39032B	DFN8	Reel
AXOP39032C	SOP8	Reel
AXOP39032D	SOT23-8L	Reel
AXOP39032SA	DFN10	Reel
AXOP39032SB	SSOP10	Reel
AXOP39034A	QFN14	Reel
AXOP39034B	TSSOP14	Reel
AXOP39034SA	QFN16	Reel
AXOP39034SB	SOP16	Reel



Contents

Description.....	1
Features.....	1
Applications	1
1 Block Diagram and Application Circuit.....	4
2 Pin Description	5
2.1 AXOP39032A/B/C/D Pinouts	5
2.2 AXOP39032SA/B Pinouts.....	6
2.3 AXOP39034A/B Pinouts	7
2.4 AXOP39034SA/B Pinouts.....	8
3 Electrical Specifications	9
3.1 Absolute Maximum Ratings	9
3.2 Thermal Data.....	9
3.3 ESD and Latch Up.....	9
3.4 Electrical Characteristics	10
3.5 Typical Electrical Characteristics	12
4 Functional Description	15
4.1 Overview	15
4.2 Rail to Rail Input	15
4.3 Rail to Rail Output	15
4.4 Overload Recovery.....	15
4.5 EMI Rejection	15
4.6 Shutdown	15
5 Package Information	16
5.1 Package Dimensions	16
5.2 Marking Information.....	26
6 Packing Information.....	30
7 Revision History	31

List of Figures

Figure 1 Block Diagram.....	4
Figure 2 Typical Application Circuit	4
Figure 3 AXOP39032A/B/C/D Pinouts	5
Figure 4 AXOP39032SA/B Pinouts	6
Figure 5 AXOP39034A/B Pinouts.....	7
Figure 6 AXOP39034SA/B Pinouts	8
Figure 7 Vos Distribution.....	12
Figure 8 Vos vs Input Common Mode Voltage	12
Figure 9 Vos vs Vs.....	12
Figure 10 Iq (per opamp) vs Input Common Mode Voltage	13
Figure 11 Iq (per opamp) vs Vs.....	13
Figure 12 THD+N vs Frequency.....	13
Figure 13 Large Signal Step Response.....	14
Figure 14 Small Signal Overshoot vs Capacitive Load.....	14
Figure 15 TSSOP8 Mechanical Data and Package Dimensions	16
Figure 16 DFN8 Mechanical Data and Package Dimensions	17
Figure 17 SOP8 Mechanical Data and Package Dimensions	18
Figure 18 SOT23-8L Mechanical Data and Package Dimensions	19
Figure 19 DFN10 Mechanical Data and Package Dimensions	20
Figure 20 SSOP10 Mechanical Data and Package Dimensions.....	21
Figure 21 QFN14 Mechanical Data and Package Dimensions	22
Figure 22 TSSOP14 Mechanical Data and Package Dimensions.....	23
Figure 23 QFN16 Mechanical Data and Package Dimensions	24
Figure 24 SOP16 Mechanical Data and Package Dimensions	25
Figure 25 TSSOP8 Marking Information.....	26
Figure 26 DFN8 Marking Information	26
Figure 27 SOP8 Marking Information	27
Figure 28 SOT23-8L Marking Information	27
Figure 29 DFN10 Marking Information	28
Figure 30 SSOP10 Marking Information.....	28
Figure 31 QFN16 Marking Information	29
Figure 32 SOP16 Marking Information	29
Figure 33 Reel Packing Information	30

List of Tables

Table 1 Device Summary	1
Table 2 Absolute Maximum Ratings.....	9
Table 3 Thermal Data	9
Table 4 ESD and Latch up	9
Table 5 Electrical Characteristics	10
Table 6 Document Revision History	31

1 Block Diagram and Application Circuit

Figure 1 Block Diagram


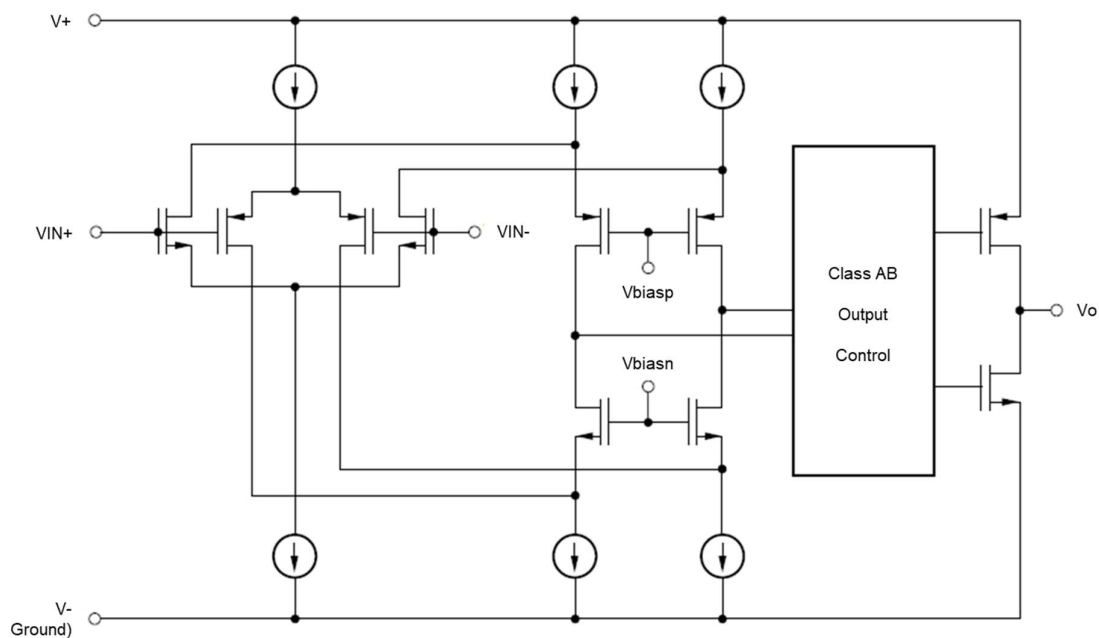



Figure 2 Typical Application Circuit (Stereo Sound Input Amplifier)

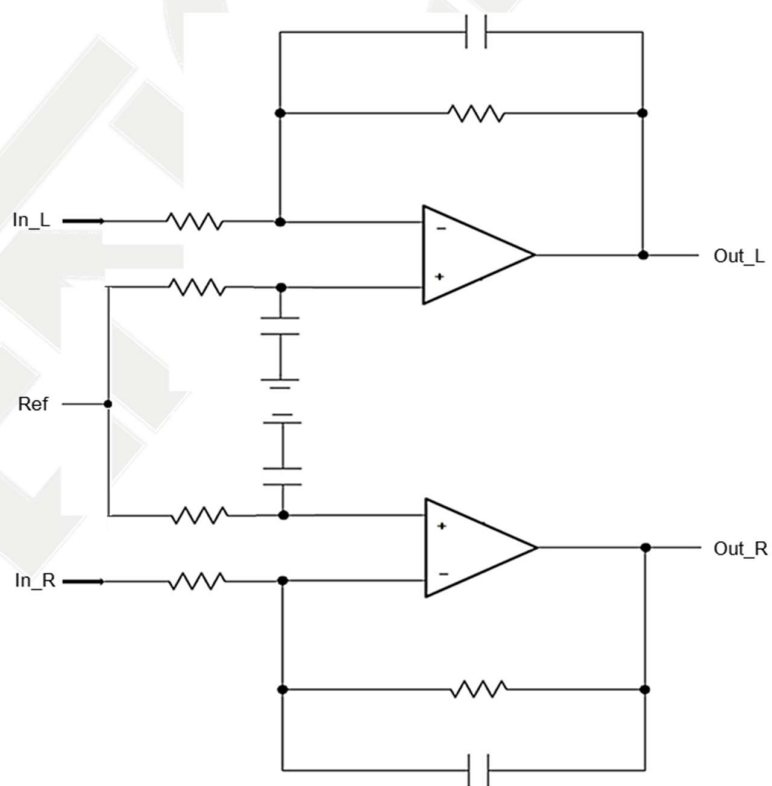

2 Pin Description

2.1 AXOP39032A/B/C/D Pinouts


Figure 3 AXOP39032A/B/C/D Pinouts

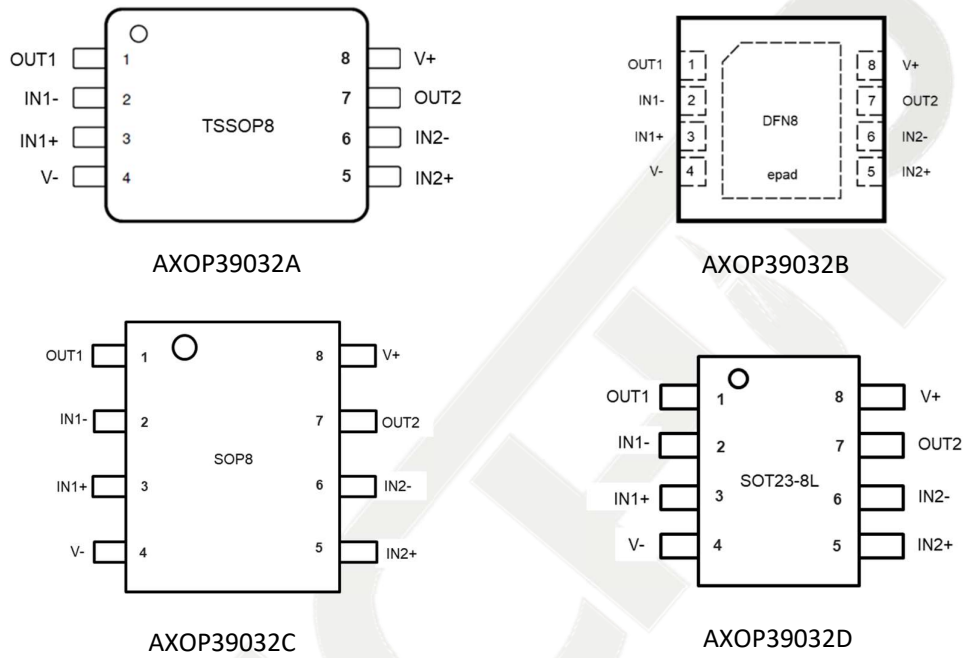

Pin number	Pin name	Description
1	OUT1	Output 1
2	IN1-	Inverting input 1
3	IN1+	Non-inverting input 1
4	V-	Negative supply or ground
5	IN2+	Non-inverting input 2
6	IN2-	Inverting input 2
7	OUT2	Output 2
8	V+	Positive supply

2.2 AXOP39032SA/B Pinouts


Figure 4 AXOP39032SA/B Pinouts

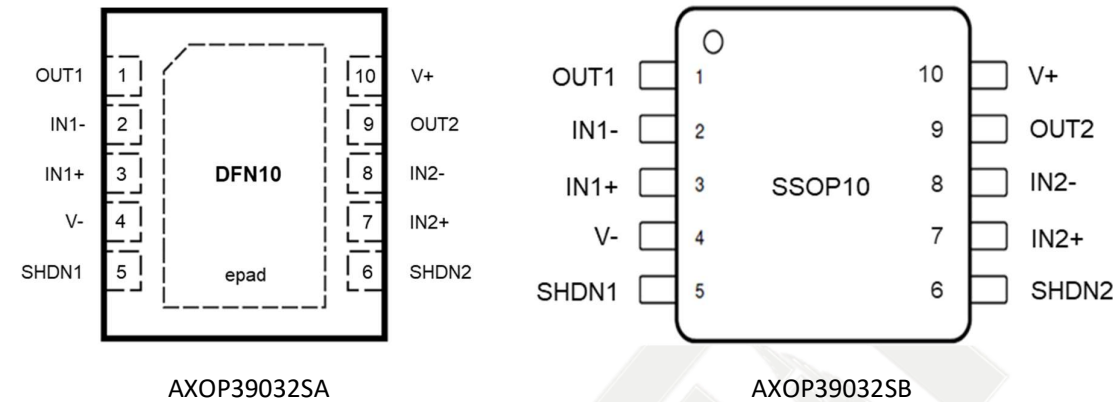

Pin number	Pin name	Description
1	OUT1	Output 1
2	IN1-	Inverting input 1
3	IN1+	Non-inverting input 1
4	V-	Negative supply or ground
5	SHDN1	Shutdown1: "low" = opamp 1 disabled
6	SHDN2	Shutdown2: "low" = opamp 2 disabled
7	IN2+	Non-inverting input 2
8	IN2-	Inverting input 2
9	OUT2	Output 2
10	V+	Positive supply

2.3 AXOP39034A/B Pinouts


Figure 5 AXOP39034A/B Pinouts

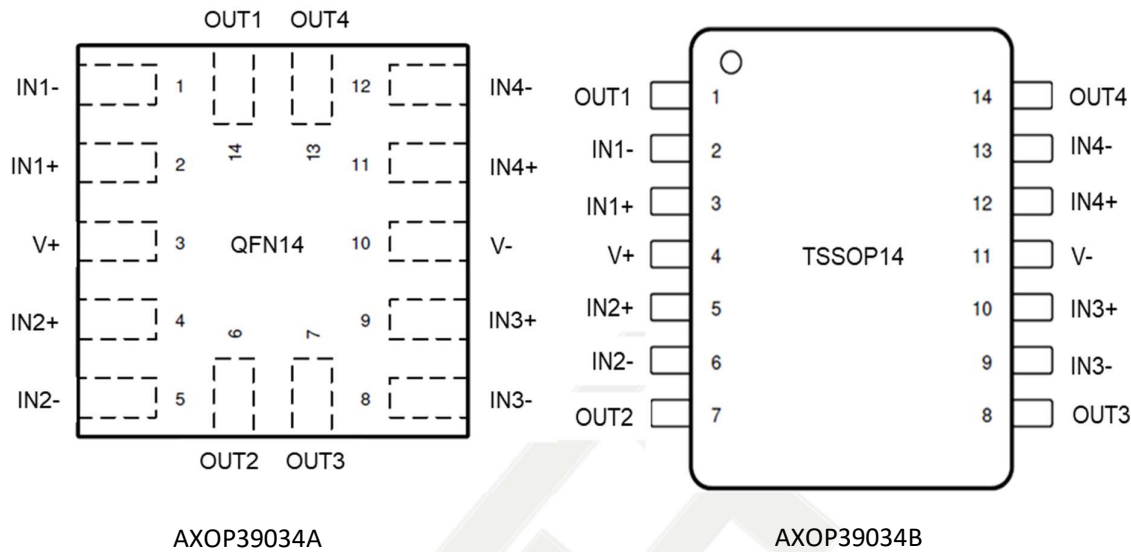

AXOP39034A			AXOP39034B	
Pin number	QFN14 Pin name	QFN14 Description	TSSOP14 Pin name	TSSOP14 Description
1	IN1-	Inverting input 1	OUT1	Output 1
2	IN1+	Non-inverting input 1	IN1-	Inverting input 1
3	V+	Positive supply	IN1+	Non-inverting input 1
4	IN2+	Non-inverting input 2	V+	Positive supply
5	IN2-	Inverting input 2	IN2+	Non-inverting input 2
6	OUT2	Output 2	IN2-	Inverting input 2
7	OUT3	Output 3	OUT2	Output 2
8	IN3-	Inverting input 3	OUT3	Output 3
9	IN3+	Non-inverting input 3	IN3-	Inverting input 3
10	V-	Negative supply or ground	IN3+	Non-inverting input 3
11	IN4+	Non-inverting input 4	V-	Negative supply or ground
12	IN4-	Inverting input 4	IN4+	Non-inverting input 4
13	OUT4	Output 4	IN4-	Inverting input 4
14	OUT1	Output 1	OUT4	Output 4

2.4 AXOP39034SA/B Pinouts

Figure 6 AXOP39034SA/B Pinouts

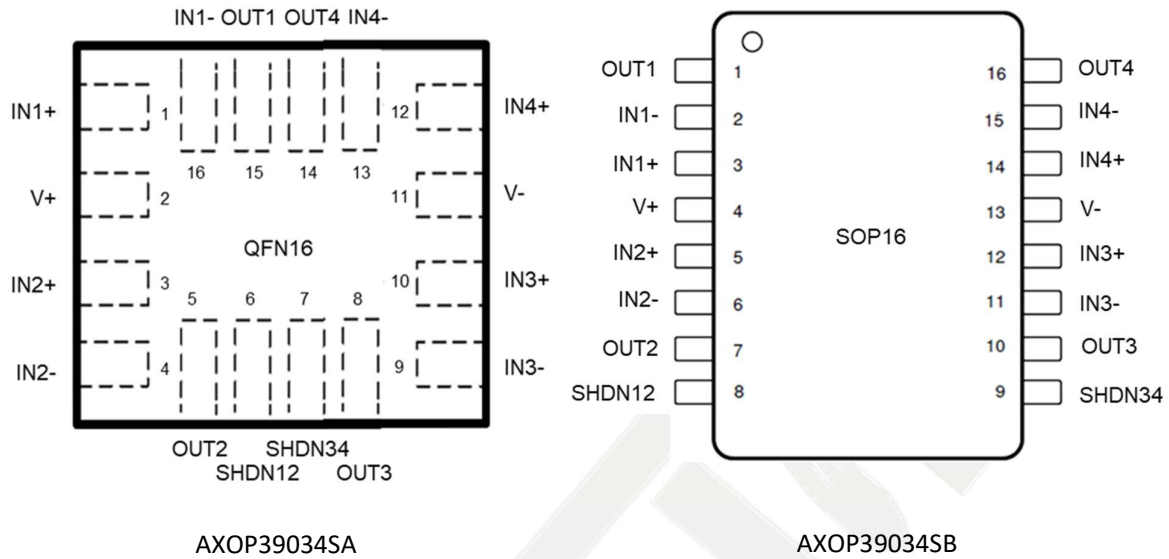

Pin number	AXOP39034SA			AXOP39034SB	
	QFN16 Pin name	QFN16 Description		SOP16 Pin name	SOP16 Description
1	IN1+	Non-inverting input 1		OUT1	Output 1
2	V+	Positive supply		IN1-	Inverting input 1
3	IN2+	Non-inverting input 2		IN1+	Non-inverting input 1
4	IN2-	Inverting input 2		V+	Positive supply
5	OUT2	Output 2		IN2+	Non-inverting input 2
6	SHDN12	Shutdown12: "low" = opamp 1&2 disabled		IN2-	Inverting input 2
7	SHDN34	Shutdown34: "low" = opamp 3&4 disabled		SHDN12	Shutdown12: "low" = opamp 1&2 disabled
8	OUT3	Output 3		SHDN34	Shutdown34: "low" = opamp 3&4 disabled
9	IN3-	Inverting input 3		IN3-	Inverting input 3
10	IN3+	Non-inverting input 3		OUT3	Output 3
11	V-	Negative supply or ground		IN3-	Inverting input 3
12	IN4+	Non-inverting input 4		IN3+	Non-inverting input 3
13	IN4-	Inverting input 4		V-	Negative supply or ground
14	OUT4	Output 4		IN4+	Non-inverting input 4
15	OUT1	Output 1		IN4-	Inverting input 4
16	IN1-	Inverting input 1		OUT4	Output 4

3 Electrical Specifications

3.1 Absolute Maximum Ratings

Table 2 Absolute Maximum Ratings

Symbol	Parameter	Value	Unit
Vs	Supply voltage (V+) - (V-)	-0.3 to +6	V
IN+, IN-	Input pin voltage	(V-) - 0.5 to (V+) +0.5	V
OUT	Output pin voltage	(V-) - 0.5 to (V+) +0.5	V
Tj	Junction temperature	150	°C
Tstg	Storage temperature	-55 to +150	°C

3.2 Thermal Data

Table 3 Thermal Data

Package	Rth j-amb	Rth j-case	Unit
TSSOP8	206	98	°C/W
DFN8	43	5	°C/W
SOP8	136	77	°C/W
SOT23-8L	184	100	°C/W
DFN10	42	6	°C/W
SSOP10	160	45	°C/W
QFN14	47	4	°C/W
TSSOP14	113	62	°C/W
QFN16	45	5	°C/W
SOP16	80	30	°C/W

3.3 ESD and Latch Up

Table 4 ESD and Latch up

Symbol	Parameter	Value	Unit
All pins	ESD (HBM) ESD (CDM)	±6,000 ±500	V V
All pins	Latch Up JESD78, Class A	≥ 100	mA

3.4 Electrical Characteristics

For $V_s = (V^+) - (V^-) = 5V$ at $T_a = 25^\circ C$, $R_L = 10k\Omega$ connected to $V_s/2$, $V_{cm} = V_s/2$, and $V_{out} = V_s/2$ (unless otherwise noted).

Table 5 Electrical Characteristics

Symbol	Parameter	Test condition	Min	Typ	Max	Unit
Vs	Supply voltage (V+) - (V-)		1.5		5.5	V
Ta	Operating ambient temperature		-40		125	°C
Power Supply						
Iq	Quiescent current per amplifier	Vs=5.5V, Io=0mA		25	40	µA
		all temp			60	
Offset Voltage						
Vos	Input offset voltage			±0.5	±2.0	mV
		all temp			±3.0	mV
dVos/dT	Drift	all temp		±0.5		µV/°C
PSRR	Power-supply rejection ratio	At DC		100		dB
Csep	Channel separation	At DC		120		dB
Input Voltage Range						
Vcm	Common mode voltage range	Vs=1.5V to 5V	(V-)-0.1		(V+)+0.1	V
CMRR	Common mode rejection ratio	At DC		100		dB
Input Bias Current						
Ib	Input bias current			±0.5		pA
Ios	Input offset current			±0.05		pA
Noise						
En	Input voltage noise	f=20Hz to 20kHz		4		µV
en	Input voltage noise density	f=10kHz		25		nV/√Hz
		f=1kHz		31		
Input Capacitance						
Cid	Differential			2		pF
Cic	Common mode			4		pF
Open Loop Gain						
Aol	Open loop voltage gain			100		dB
Frequency Response						
GBP	Gain bandwidth product	G=+1, CL=10pF		2		MHz
φ	Phase margin	G=+1, CL=10pF		55		°
Cload	Capacitive load	G=+1			1	nF
SR	Slew rate	G=+1, CL=100pF		0.5		V/µs

Ts	Settling time	To 0.1%, 2V step, G=+1, CL=100pF		6		μs
Tor	Overload recovery time	VIN x gain > Vs, CL=100pF		200		ns
THD+N	Total harmonic distortion + Noise (3 rd order filter; BW= 80kHz at -3dB.)	Vs=5.5V, Vcm=2.5V, Vo=1Vrms, G=+1, f=1kHz		100		dB
SNR	Signal to Noise Ratio			100		dB
Output						
Vo	Voltage output swing from supply rails	RL=10kΩ		5	10	mV
		RL=2kΩ		15	30	
Isc	Short circuit current			±30		mA
Zo	Open loop output impedance	f=10MHz		100		Ω
Shutdown						
Iqsd	Quiescent current per amplifier	Vs=1.5V to 5.5V, all amplifiers disabled, SHDN = Low		0.5	1.5	μA
Vsdh	High level shutdown threshold	Vs=1.5V to 5.5V, amplifier enabled	Vs-0.5V			V
Vsdl	Low level shutdown threshold	Vs=1.5V to 5.5V, amplifier disabled			0.5	V
ton	Amplifier enable time	Vs=1.5V to 5.5V, full shutdown; G=+1, Vo = 0.9×Vs/2, RL connected to V-		10		μs
toff	Amplifier disable time	Vs=1.5V to 5.5V, G=+1, Vo=0.1×Vs/2, RL connected to V-		0.6		μs

Disable time (toff) and enable time (ton) are defined as the time interval between the 50% point of the signal applied to the SHDN pin and the point at which the output voltage reaches the 10% (disable) or 90% (enable) level.

3.5 Typical Electrical Characteristics

Figure 7 Vos Distribution

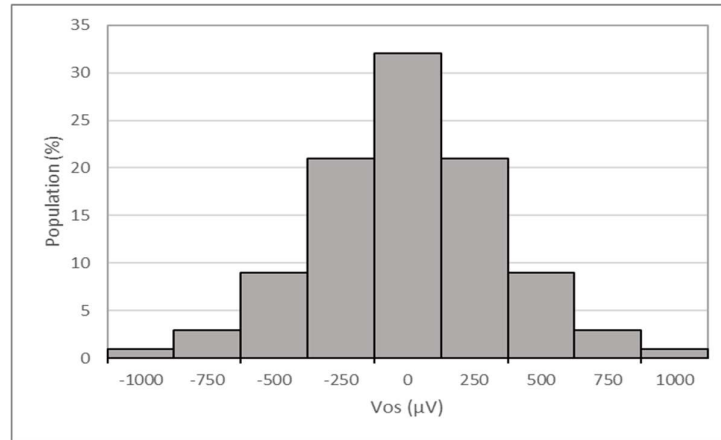


Figure 8 Vos vs Input Common Mode Voltage

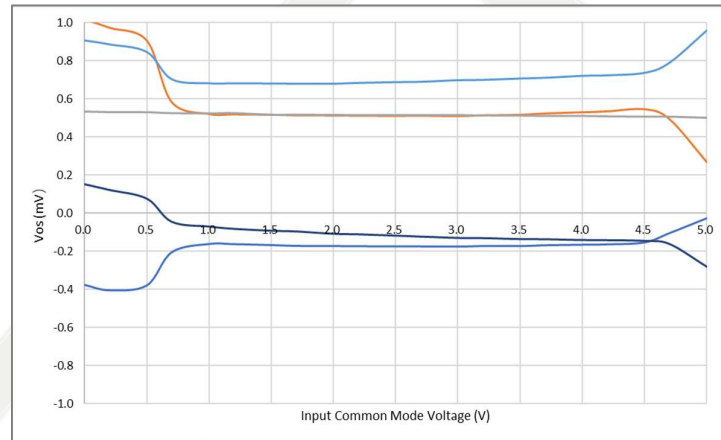


Figure 9 Vos vs Vs

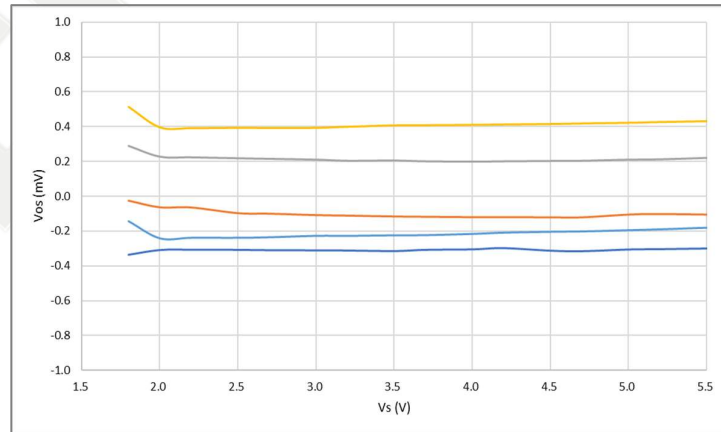


Figure 10 Iq (per opamp) vs Input Common Mode Voltage

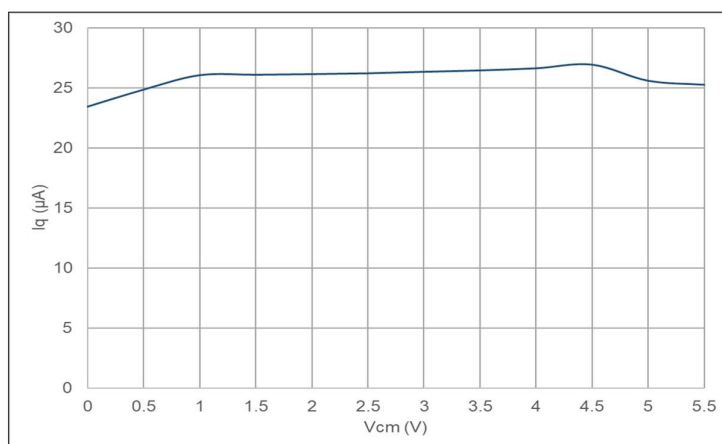


Figure 11 Iq (per opamp) vs Vs

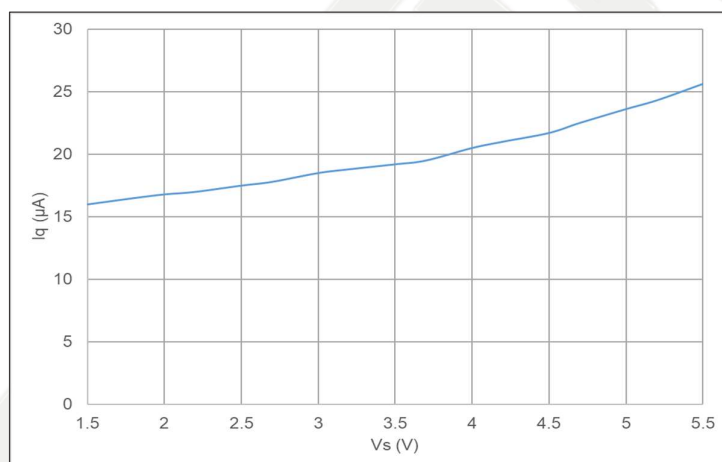


Figure 12 THD+N vs Frequency

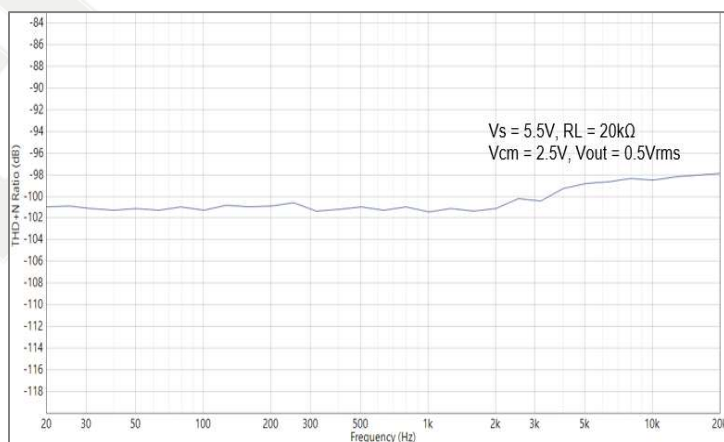


Figure 13 Large Signal Step Response


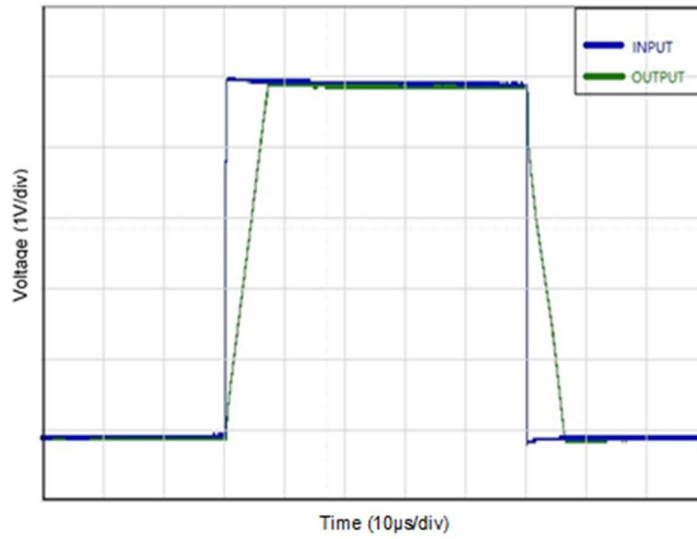


Figure 14 Small Signal Overshoot vs Capacitive Load

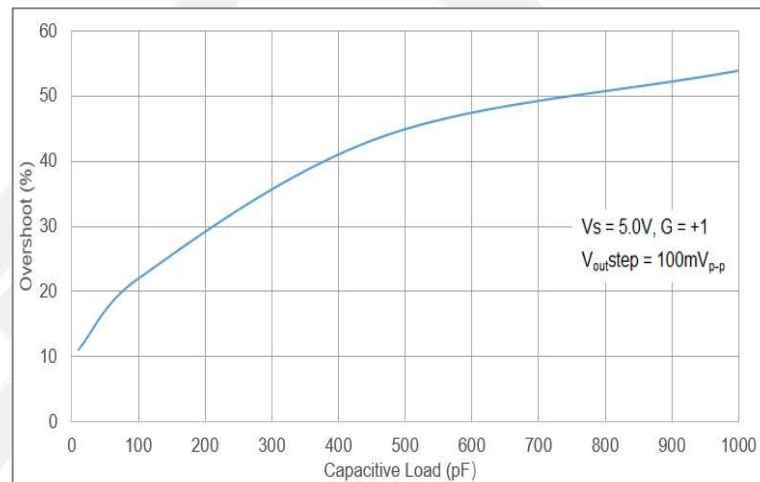

4 Functional Description

4.1 Overview

The AXOP3903x devices are a family of low power, rail-to-rail input and output opamps. These devices operate from 1.5V to 5.5V, are unity gain stable, and are designed for a wide range of applications and used in virtually any single supply application.

4.2 Rail to Rail Input

The input common mode voltage range of the AXOP3903x family extends 100mV beyond the supply rails for the full supply voltage range of 1.5V to 5.5V. This performance is achieved with a complementary input stage: a N-channel input differential pair in parallel with a P-channel differential pair, as shown in Figure 1. The N-channel pair is active for input voltages close to the positive rail, typically $(V^+)-1.4V$ to 200mV above the positive supply, whereas the P-channel pair is active for inputs from 200mV below the negative supply to approximately $(V^+)-1.4V$. There is a transition region, in which both pairs are on. Within this transition region, PSRR, CMRR, offset voltage, offset drift, and THD can degrade compared to device operation outside this region.

4.3 Rail to Rail Output

Designed as a low power, low voltage operational amplifier, the AXOP3903x series delivers a robust output drive capability. A class AB output stage with common source Mosfets achieves full rail-to-rail output swing capability. For resistive loads of 10k Ω , the output swings to within 10mV (typ) of either supply rail, regardless of the applied power supply voltage. Different load conditions change the ability of the amplifier to swing close to the rails.

4.4 Overload Recovery

Overload recovery is defined as the time required for the opamp output to recover from a saturated state to a linear state. The output devices of the opamp enter a saturation region when the output voltage exceeds the rated operating voltage, because of the high input voltage or the high gain. After the device enters the saturation region, the charge carriers in the output devices require time to return to the linear state. After the charge carriers return to the linear state, the device begins to slew at the specified slew rate. The overload recovery time for the AXOP3903x family is approximately 200ns.

4.5 EMI Rejection

The AXOP3903x uses integrated electromagnetic interference (EMI) filtering to reduce the effects of EMI from sources such as wireless communications and densely populated boards with a mix of analog signal chain and digital components.

4.6 Shutdown

The AXOP3903xS has shutdown function. The amplifiers can be shut down by enabling the respective shutdown pin.

5 Package Information

5.1 Package Dimensions

Figure 15 TSSOP8 Mechanical Data and Package Dimensions

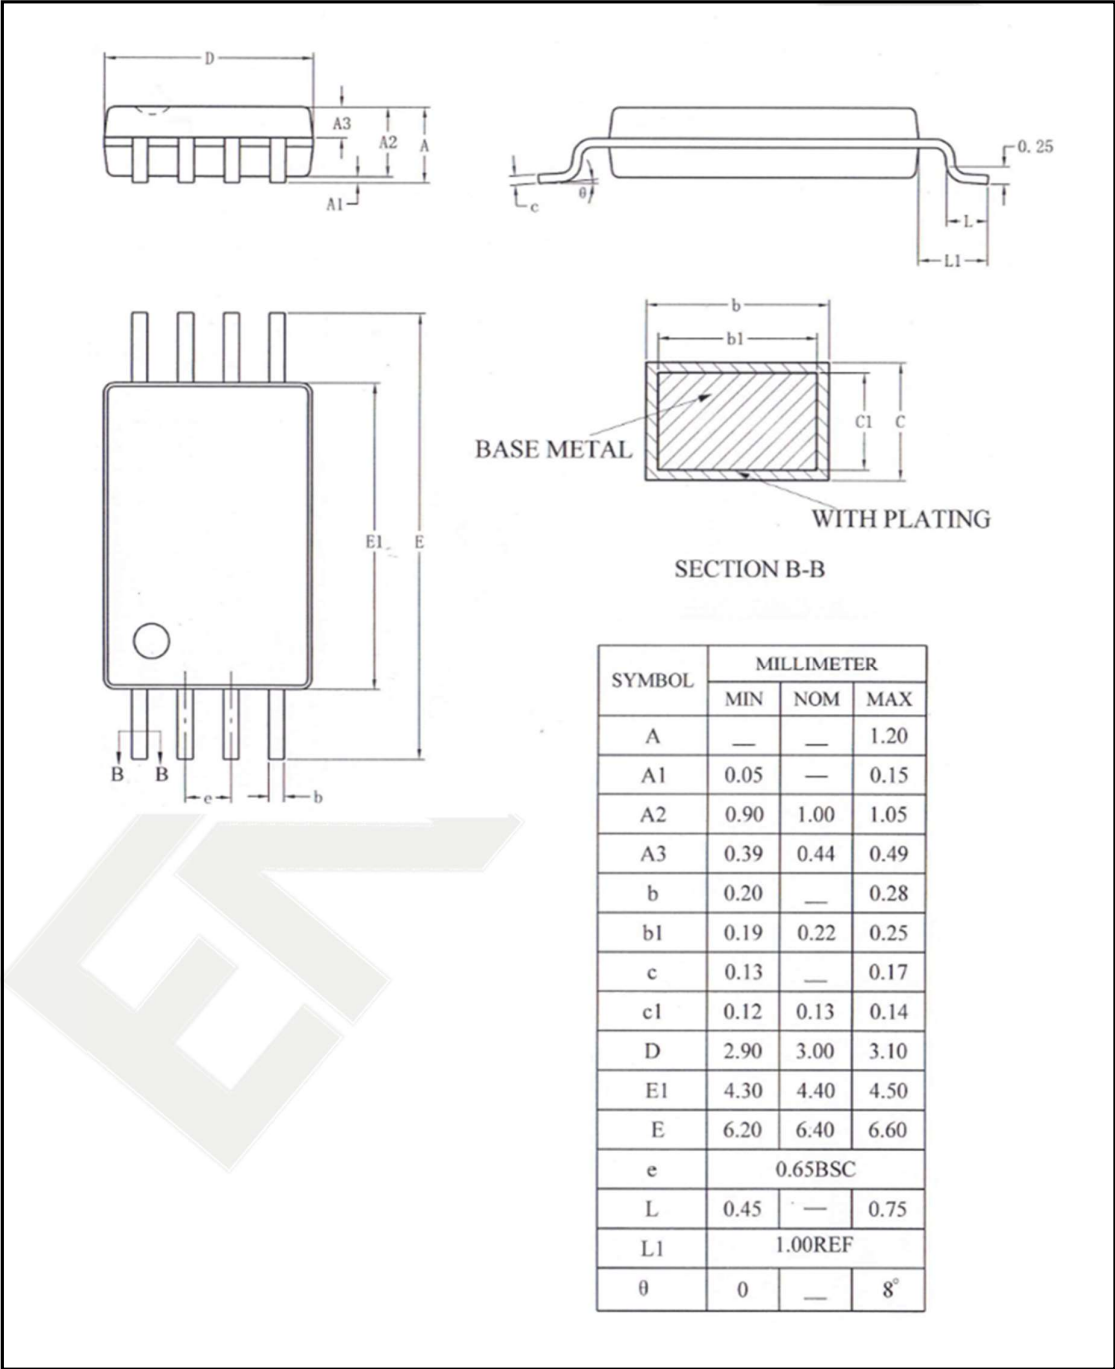


Figure 16 DFN8 Mechanical Data and Package Dimensions

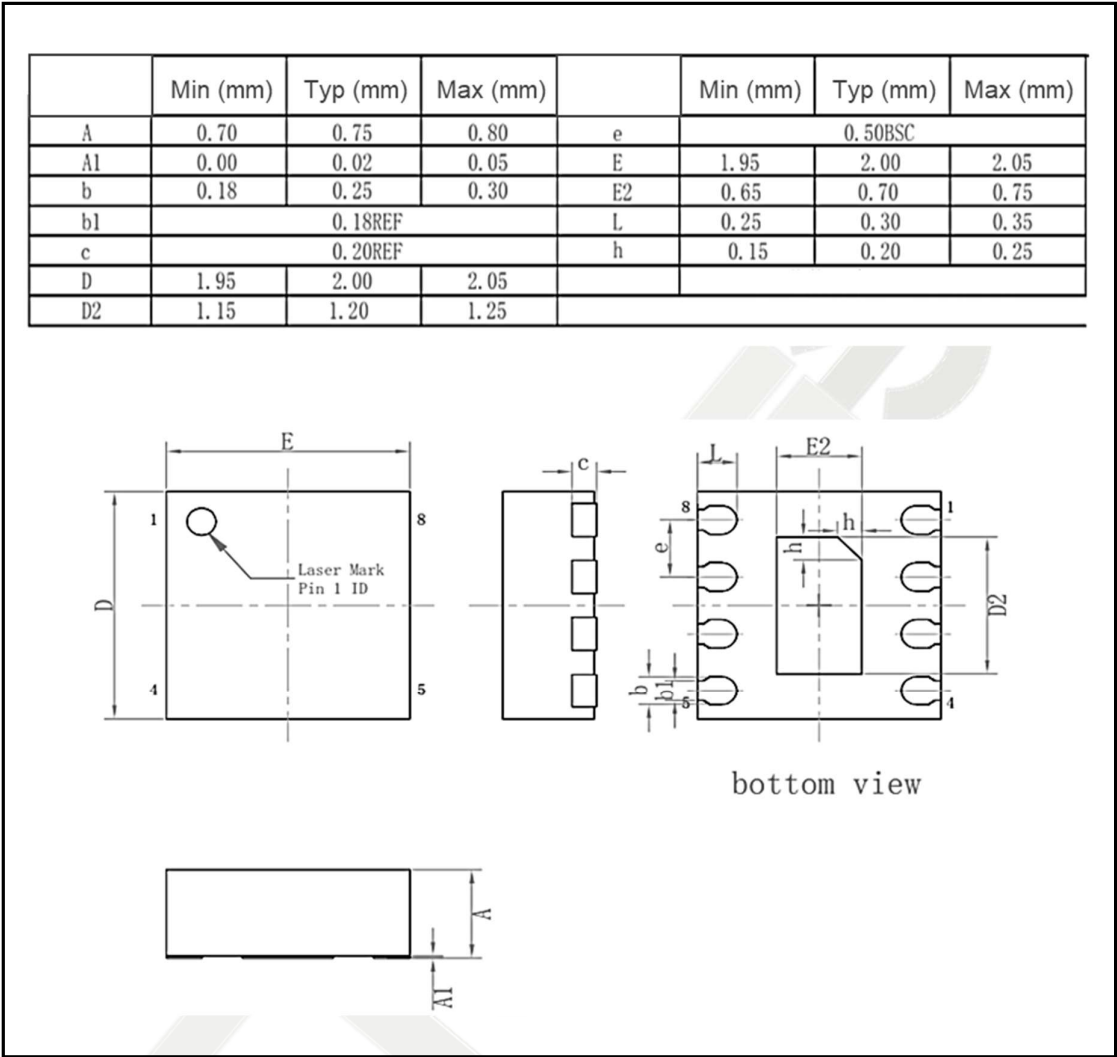


Figure 17 SOP8 Mechanical Data and Package Dimensions


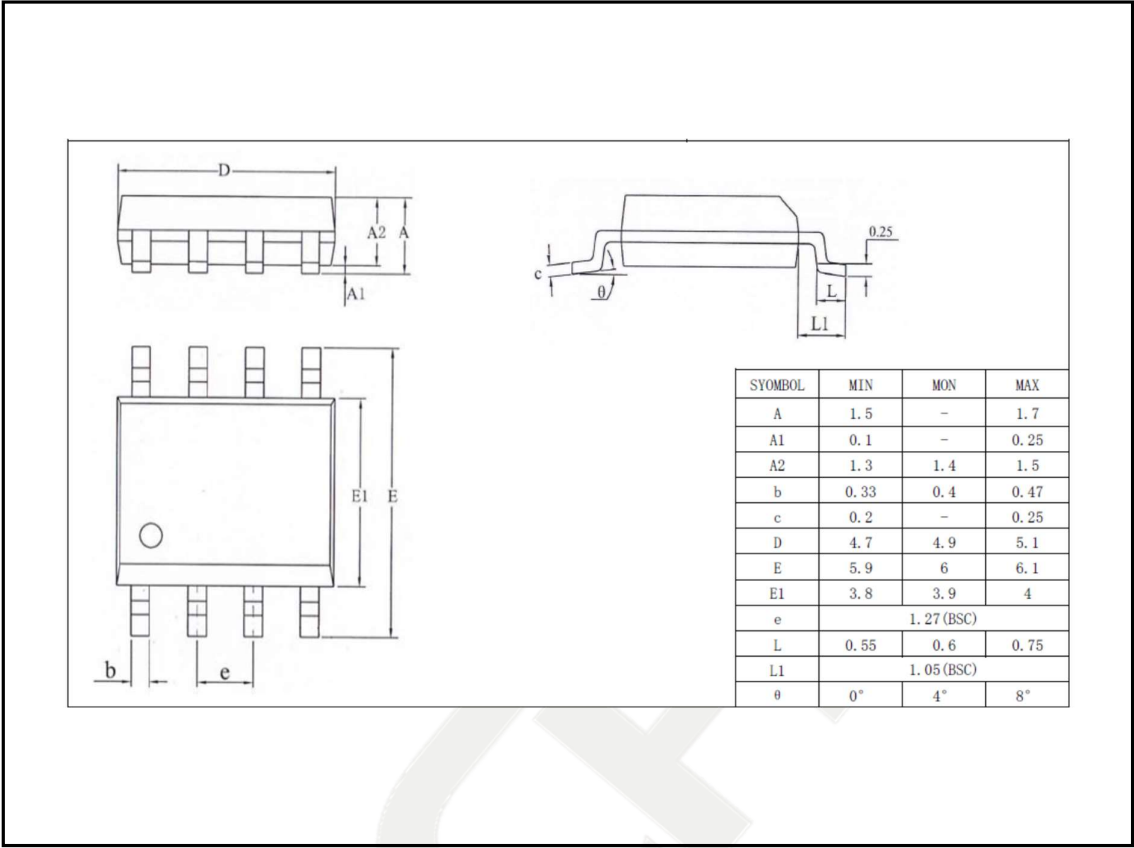


Figure 18 SOT23-8L Mechanical Data and Package Dimensions

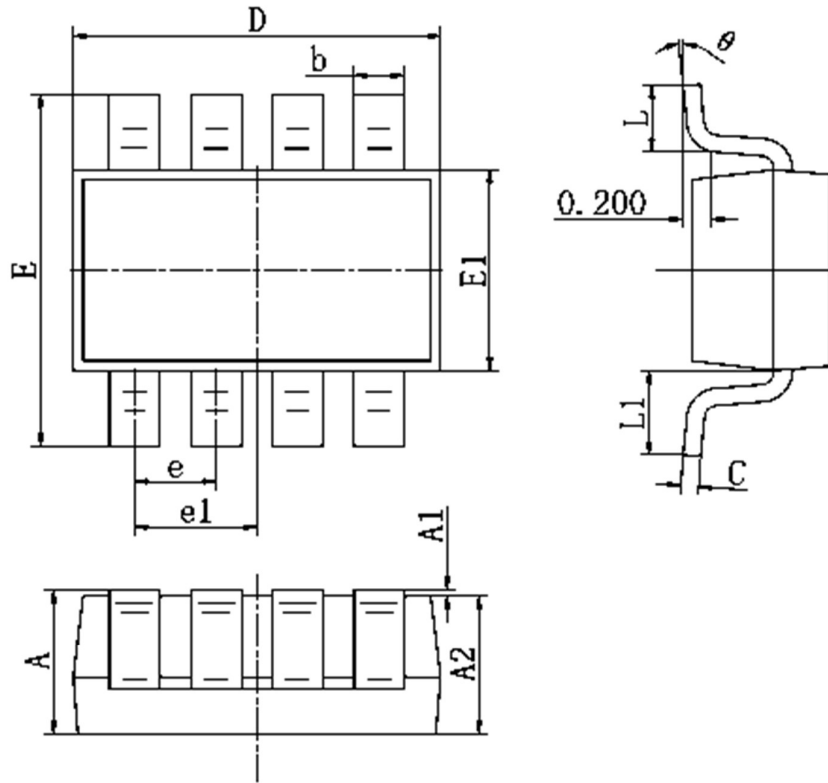

Symbol	Dimensions in Millimeters		Dimensions in Inches	
	Min.	Max.	Min.	Max.
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E1	1.500	1.700	0.059	0.067
E	2.650	2.950	0.104	0.116
e	0.650BSC.		0.026BSC.	
e1	0.975BSC.		0.038BSC.	
L	0.300	0.600	0.012	0.024
L1	0.600REF.		0.024REF.	
θ	0°	8°	0°	8°

Figure 19 DFN10 Mechanical Data and Package Dimensions

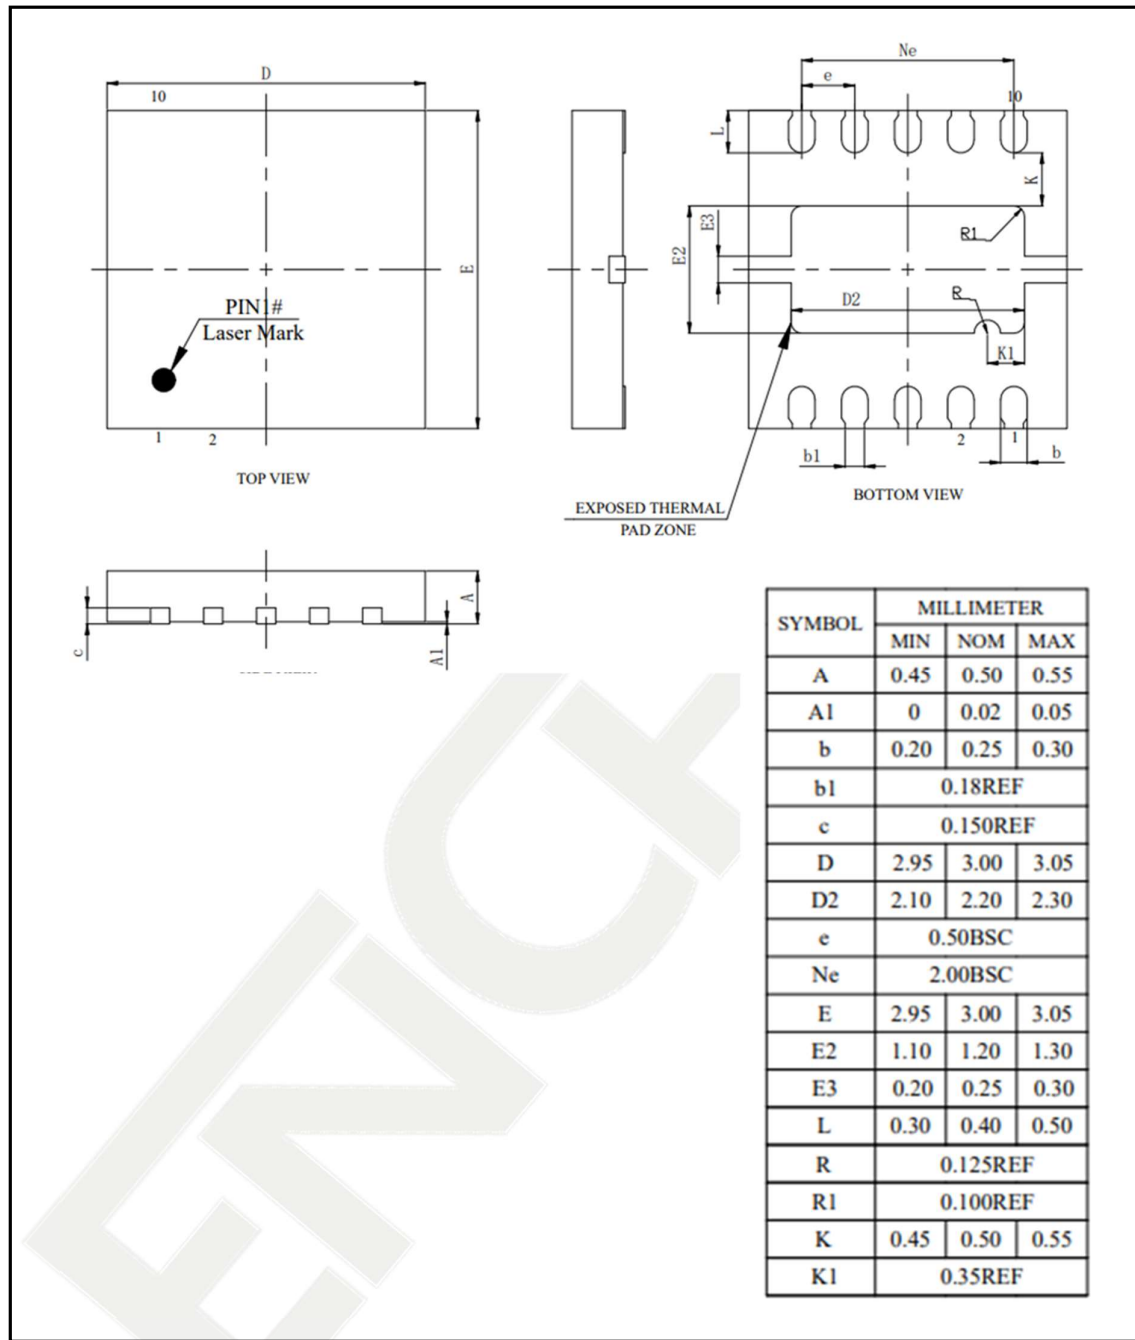


Figure 20 SSOP10 Mechanical Data and Package Dimensions

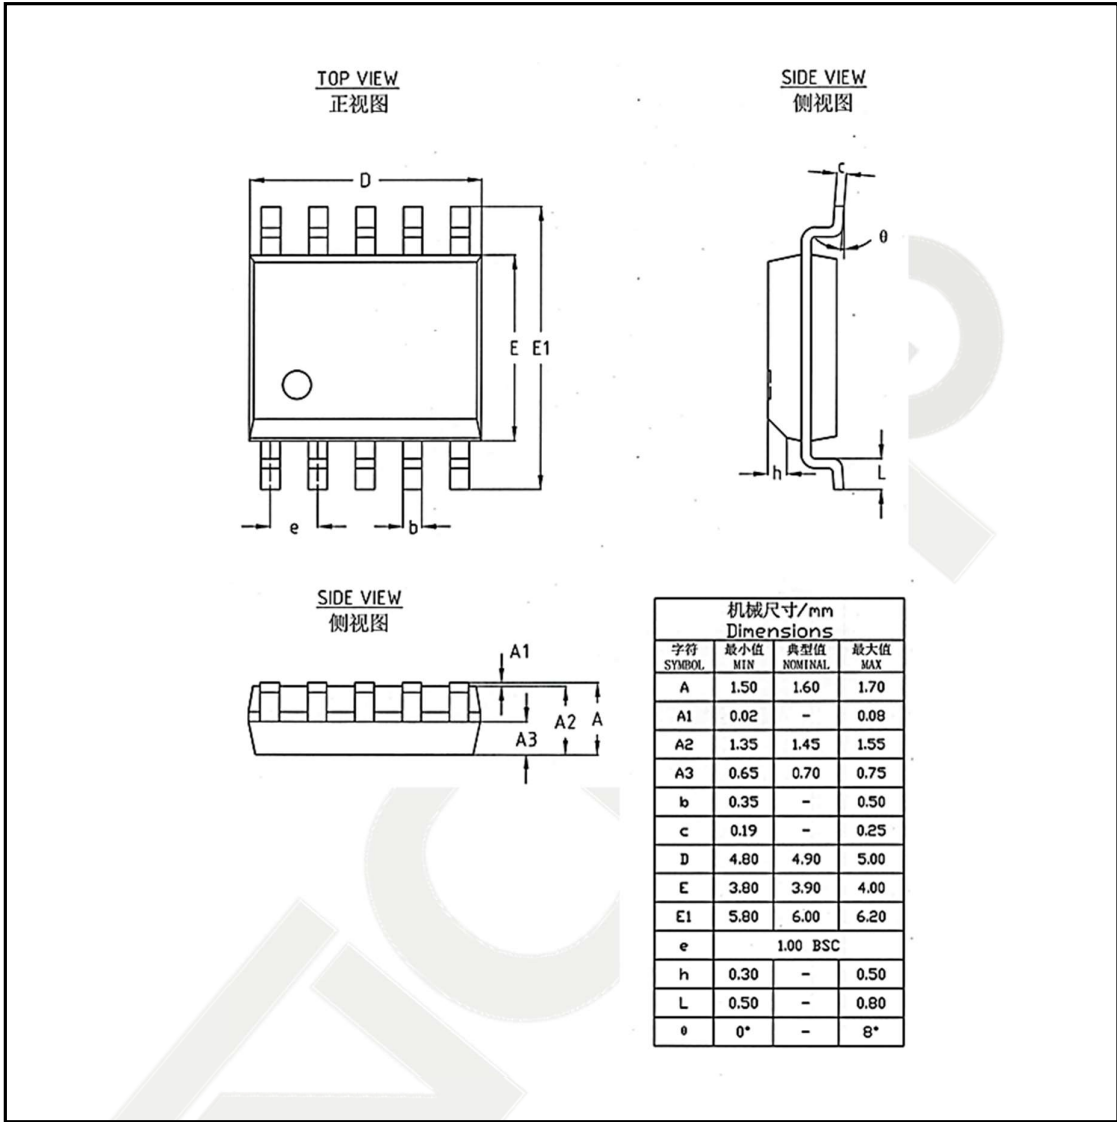


Figure 21 QFN14 Mechanical Data and Package Dimensions

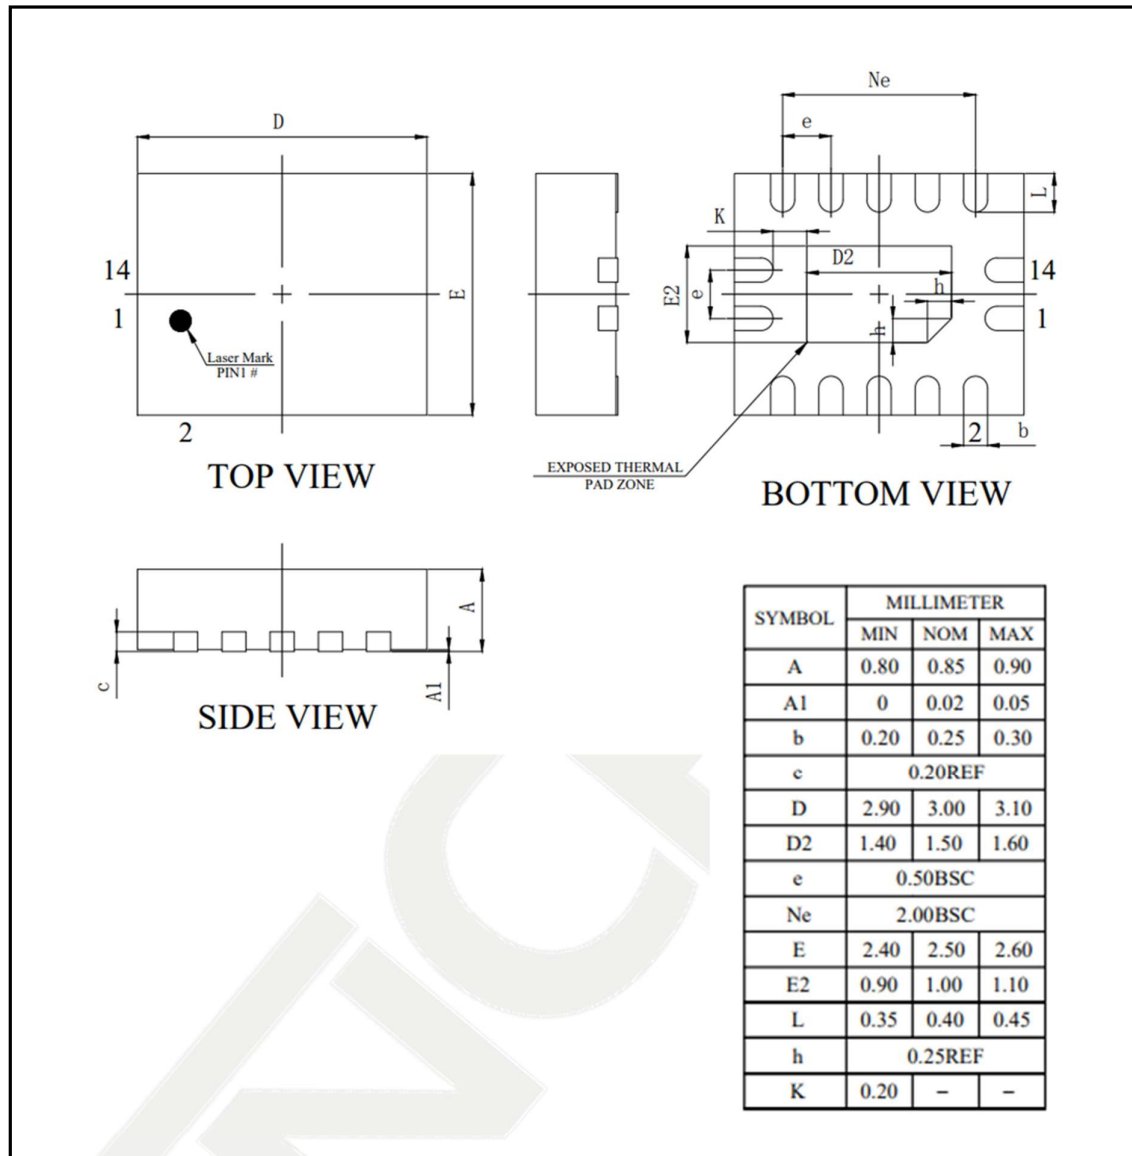


Figure 22 TSSOP14 Mechanical Data and Package Dimensions


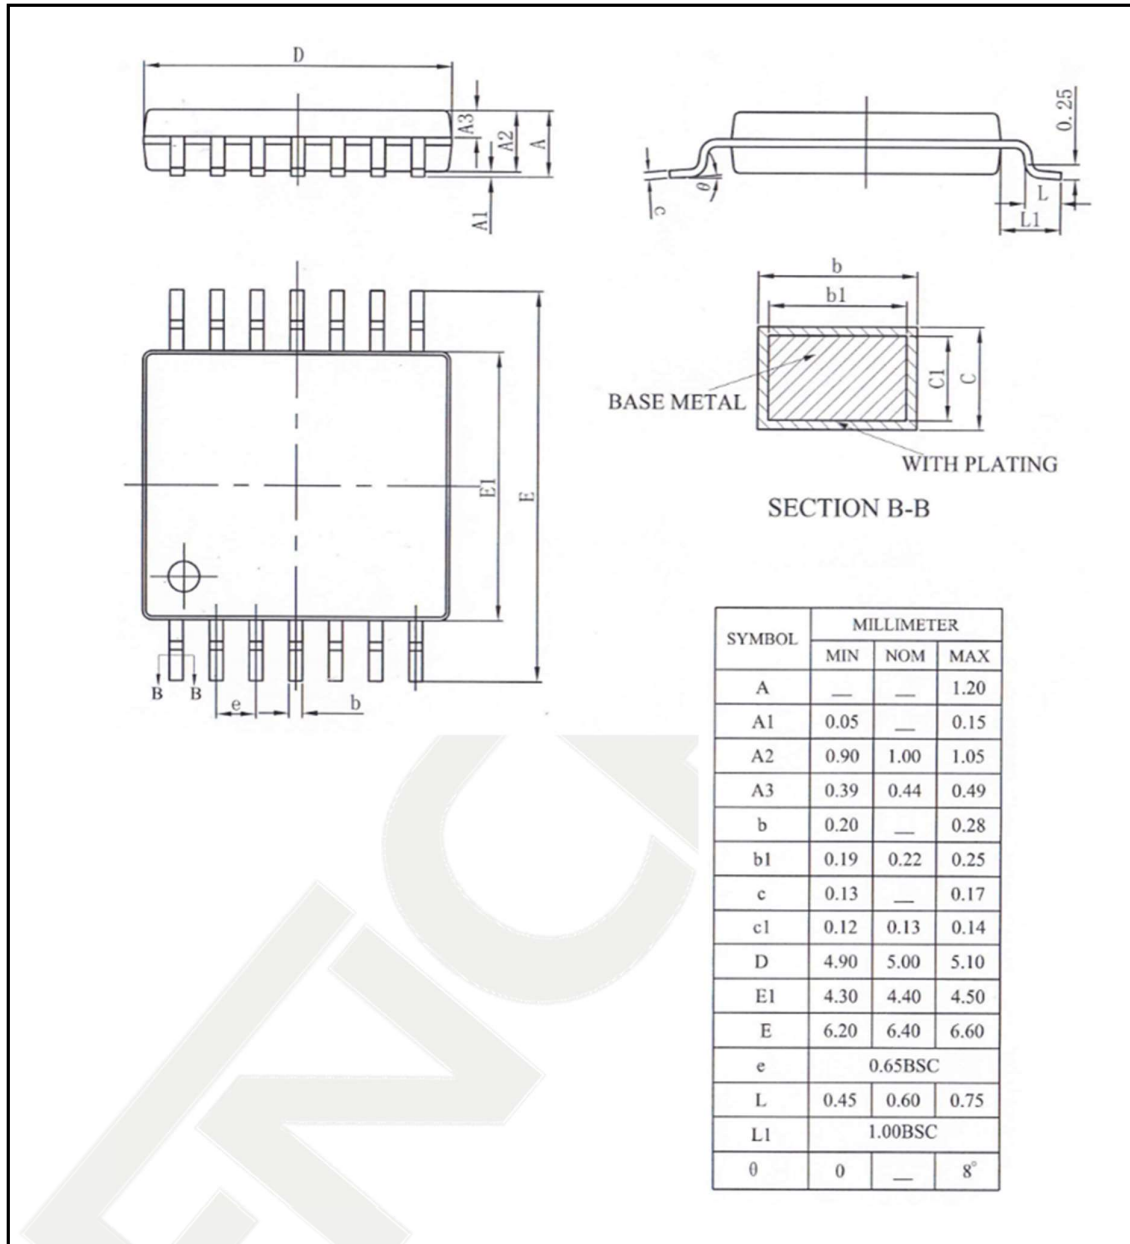


Figure 23 QFN16 Mechanical Data and Package Dimensions

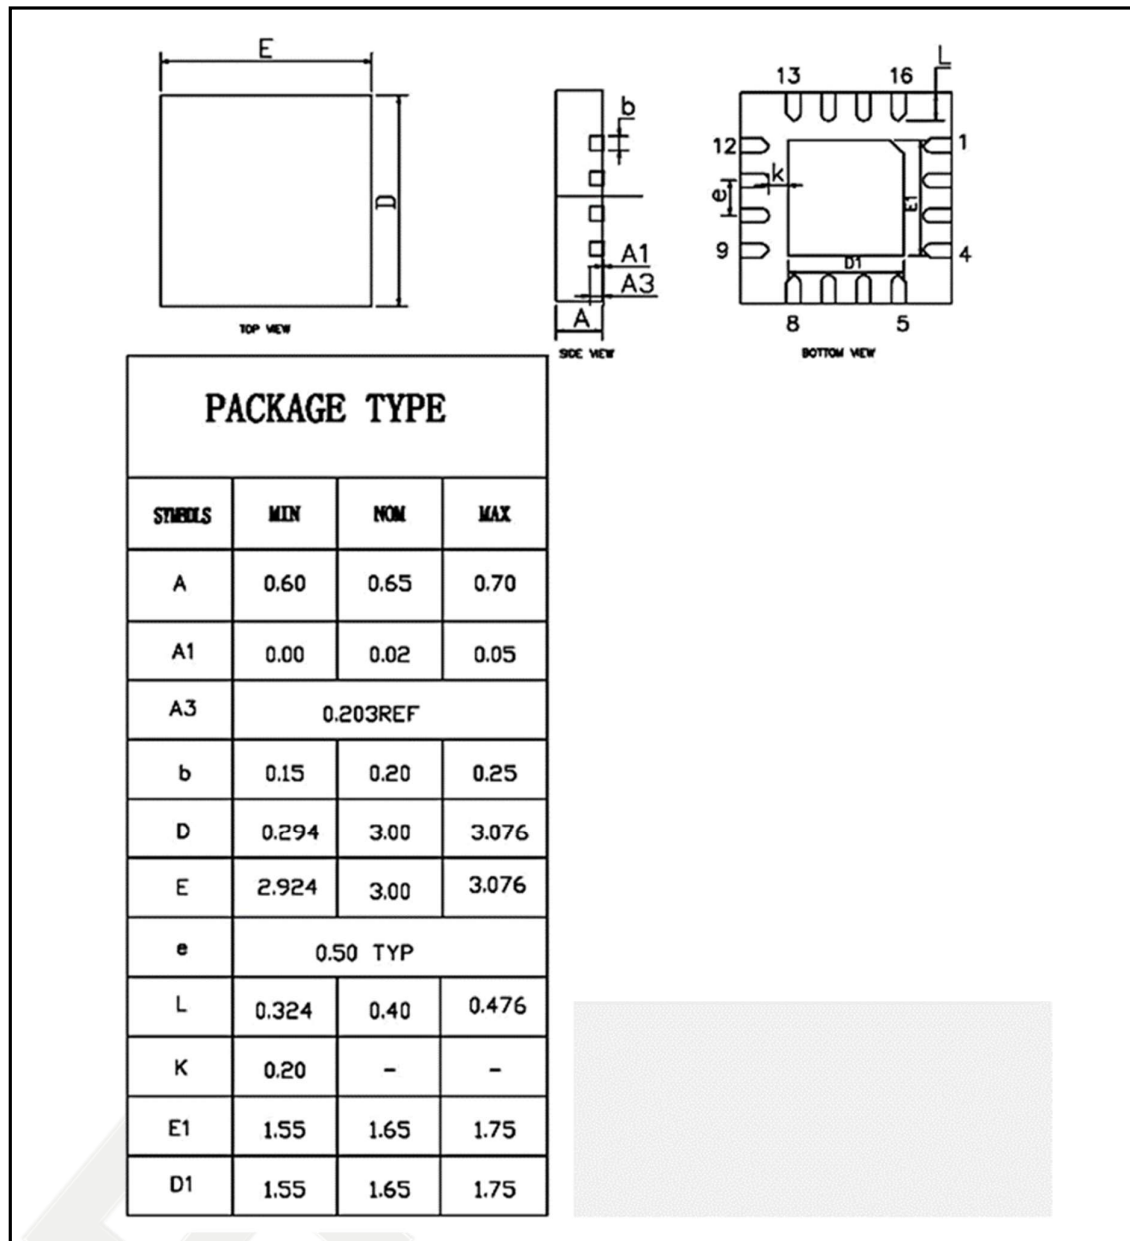

Technical drawing of a rectangular metal plate. The drawing includes three views: a top view, a side view, and a detail view A.

Top View:

- Overall width: 6.0 ± 0.15
- Overall length: 12.7 ± 0.025
- Distance from left edge to center of circular feature: 3.9 ± 0.1
- Radius of circular feature: 0.7 ± 0.05
- Distance from top edge to center of circular feature: 0.1 ± 0
- Distance from bottom edge to center of circular feature: 0.4 ± 0.025
- Callout A points to a circular feature on the bottom edge.

Side View:

- Overall width: 9.85 ± 0.05
- Overall length: 9.90 ± 0.05
- Radius of top edge: $R0.24 \pm 0.05$
- Radius of bottom edge: $R0.2 \pm 0.05$
- Top edge angle: $12^\circ \pm 0.1^\circ$
- Bottom edge angle: $10^\circ \pm 0.1^\circ$

Detail View A:

- Overall width: 3.85 ± 0.05
- Overall length: 3.9 ± 0.05
- Radius of top edge: $R0.2 \pm 0.05$
- Top edge angle: 12°
- Bottom edge angle: 10°

Section View:

- Overall width: 1.70 MAX
- Overall length: 0.25
- Radius of top edge: $R0.17$
- Radius of bottom edge: $R0.17$
- Top edge angle: 12°
- Bottom edge angle: 10°
- Distance from top edge to center of circular feature: 1.45 ± 0.05
- Distance from bottom edge to center of circular feature: 0.65 ± 0.03
- Distance from left edge to center of circular feature: 0.3 ± 0.05
- Distance from right edge to center of circular feature: 0.3 ± 0.05
- Distance from top edge to center of circular feature: 0.15 ± 0.05
- Distance from bottom edge to center of circular feature: 0.203 MAX
- Distance from top edge to center of circular feature: 0.223 MAX

Section View A:

- Overall width: 0.50 MAX
- Overall length: 0.185
- Distance from top edge to center of circular feature: 0.25
- Distance from bottom edge to center of circular feature: 0.185
- Distance from left edge to center of circular feature: 0.185
- Distance from right edge to center of circular feature: 0.185

5.2 Marking Information

Figure 25 TSSOP8 Marking Information

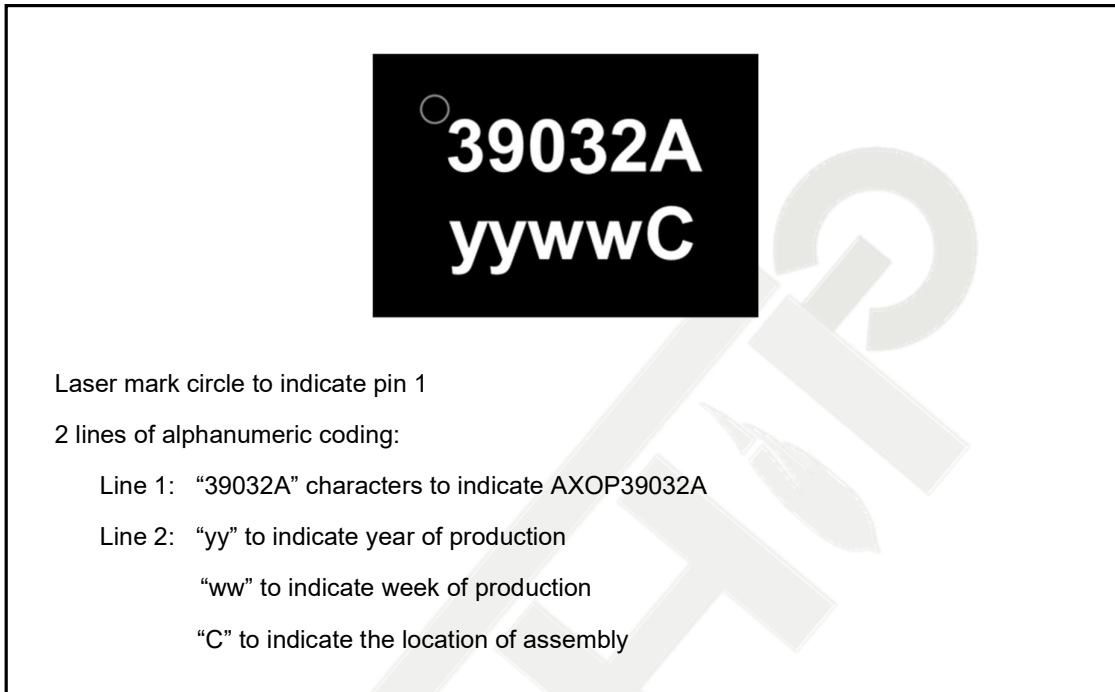


Figure 26 DFN8 Marking Information

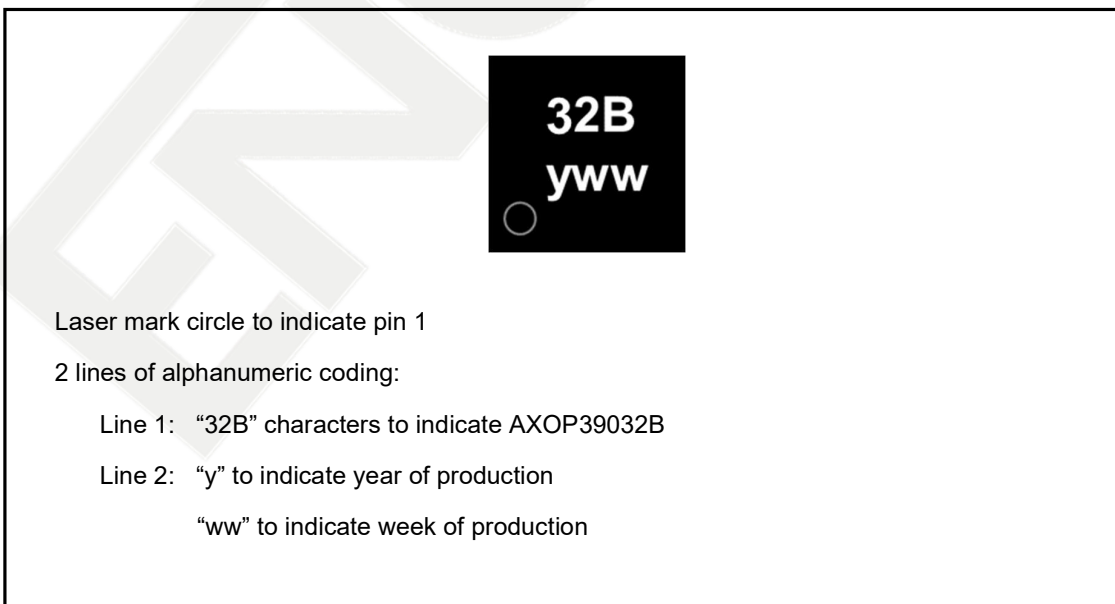


Figure 27 SOP8 Marking Information

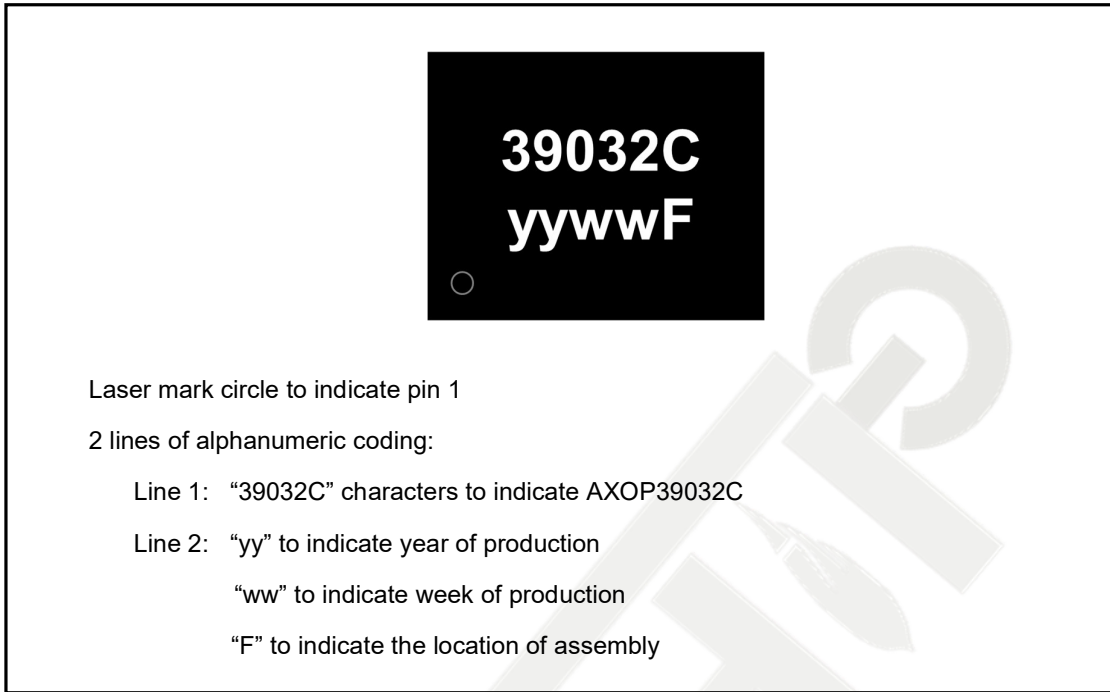


Figure 28 SOT23-8L Marking Information

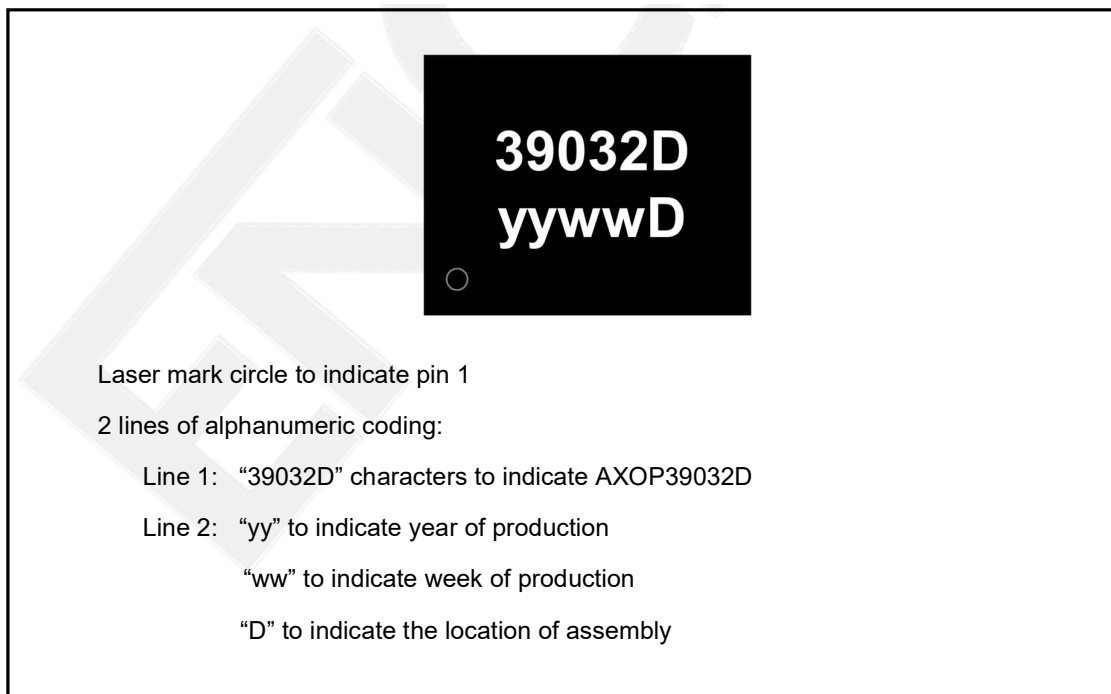


Figure 29 DFN10 Marking Information

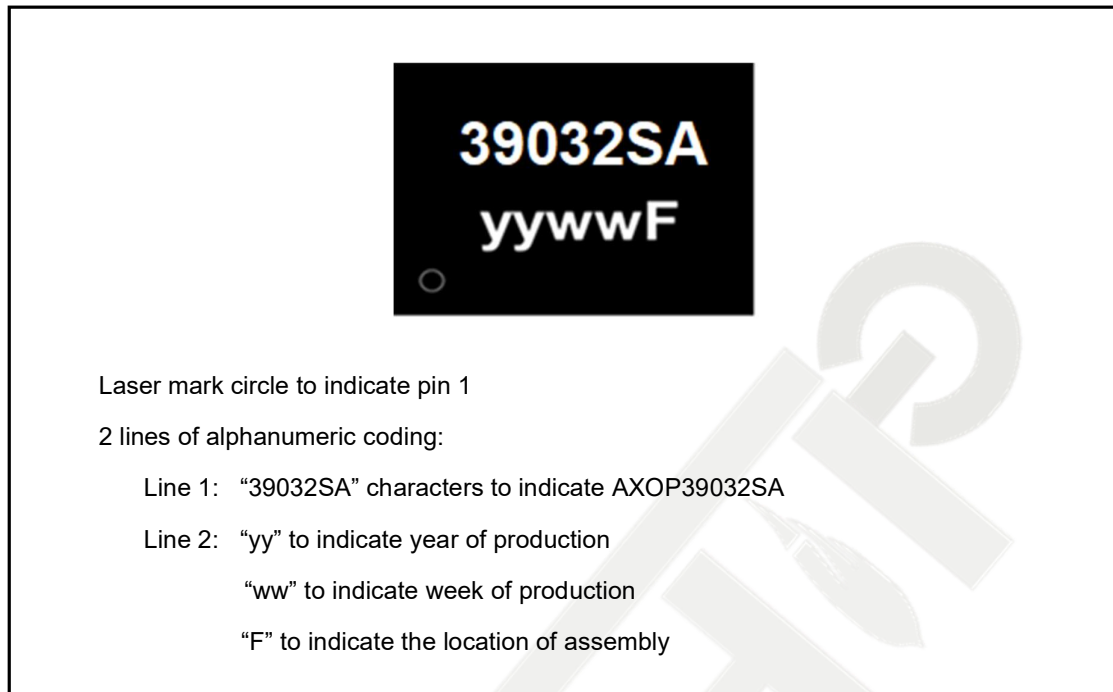


Figure 30 SSOP10 Marking Information

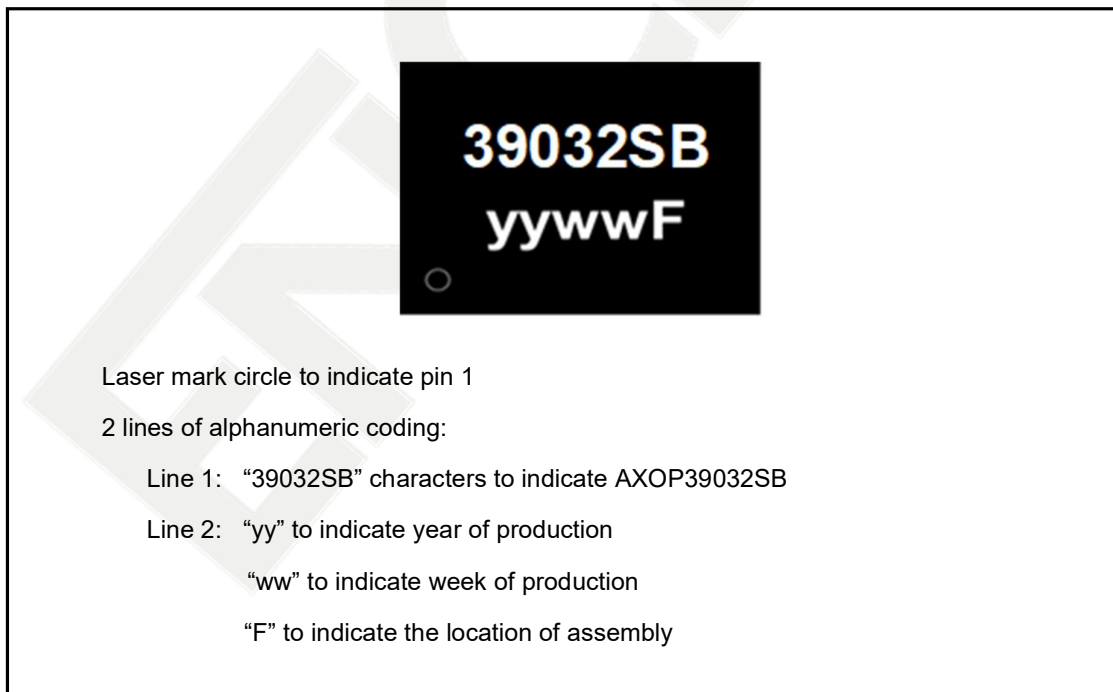


Figure 31 QFN16 Marking Information


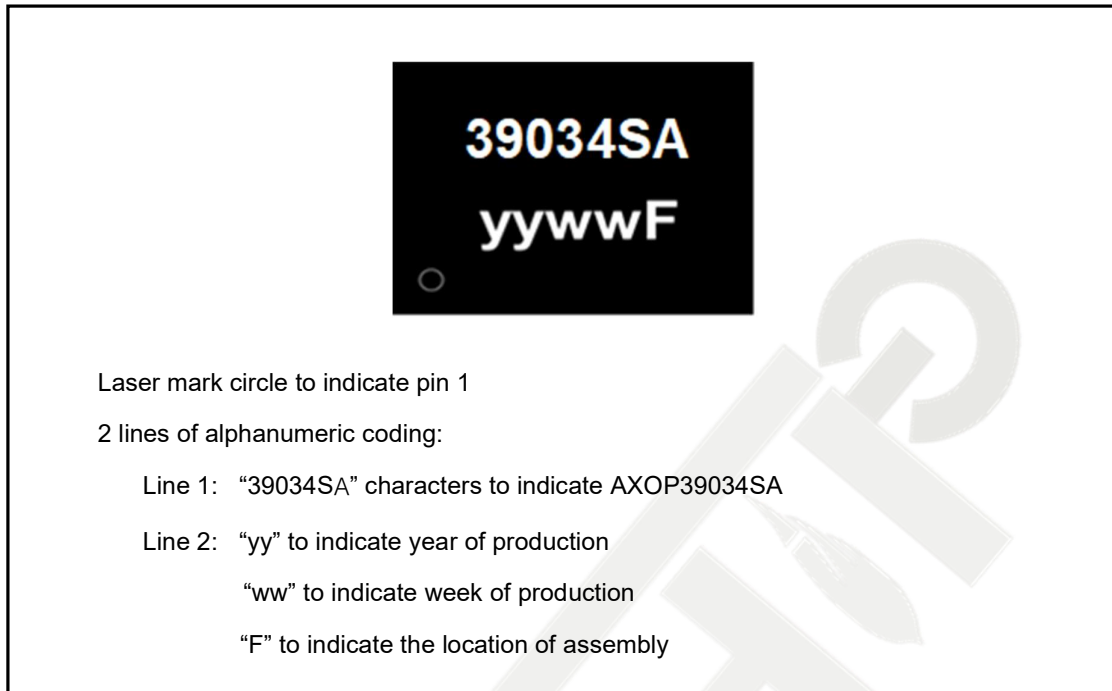


Figure 32 SOP16 Marking Information

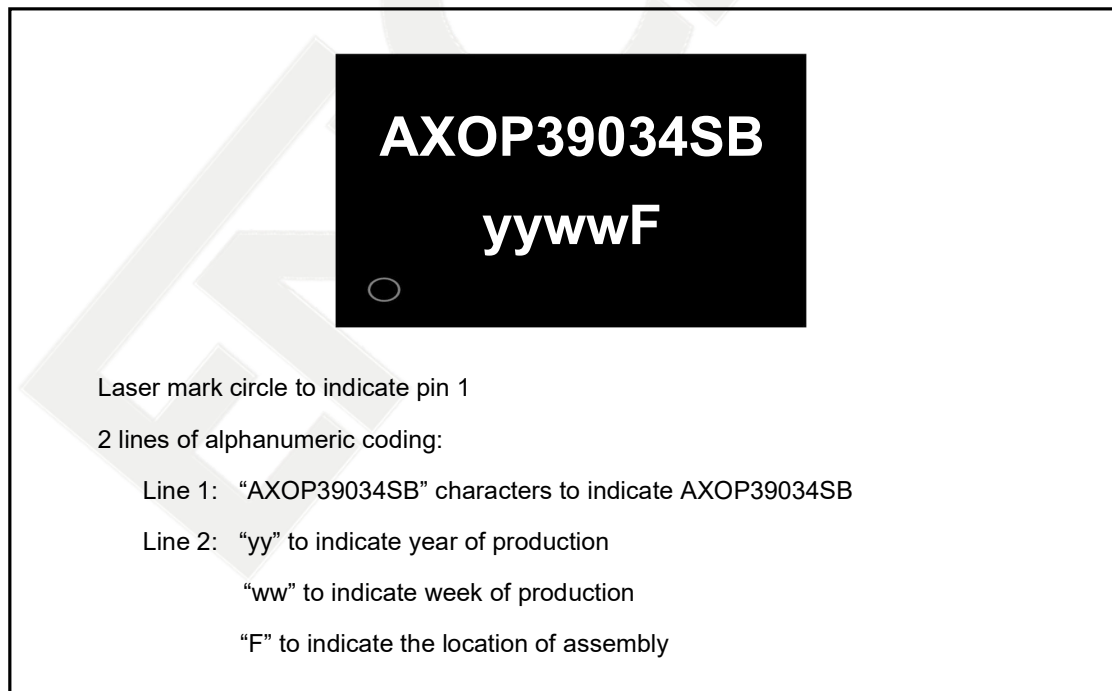

Technical drawing of a mechanical part, likely a wheel or hub, showing multiple views and dimensions.

Side View Dimensions:

- Overall height: 8.00 ± 0.10
- Top flange height: 3.50 ± 0.05
- Top flange thickness: 1.75 ± 0.10
- Distance between hole centers: 4.00 ± 0.10
- Distance between hole centers: 2.00 ± 0.05
- Distance between hole centers: 4.00 ± 0.10
- Hole diameter: $\varnothing 1.50^{+0.10}_0$
- Hole diameter: $\varnothing 0.70^{+0.10}_0$

Top View Dimensions:

- Overall diameter: $\varnothing 178$

Bottom View Dimensions:

- Distance between hole centers: 9 ± 0.5
- Distance between hole centers: 1.3 ± 0.2
- Distance between hole centers: $\varnothing 54 \pm 2$
- Distance between hole centers: 2.5 ± 0.25
- Distance between hole centers: 3.0 ± 0.5
- Distance between hole centers: 13.3 ± 0.2

Detail View:

- Two rectangular features labeled "1脚" and "2脚".
- Label "编带方向" (Banding direction) indicates the orientation.

7 Revision History

Table 6 Document Revision History

Date	Version	Description
Aug 2022	1.00	V1.00 version.
Oct 2022	1.10	Revised QFN16 2.5x2.5 to QFN16 3x3. Added SOP16. Replaced MSOP10 by SSOP10. Added marking information for QFN16, SOP16 and SSOP10.
Nov 2022	1.20	Revised Iq, BW, SR specifications.